








Specification

Product Number	SV2-0809-WT	SV2-1209-BK
Dimensions	9' (2,730mm)	
Color	White	Black
Material	28 Gauge Galvanized Steel (Colored Galvalume)	
Package	6 Pieces / Box	
Net Free Vent Area	4.1sq. in. / If	
Soffit Board	1/4" to 5/16" (8mm)	1/2" (12.5mm)

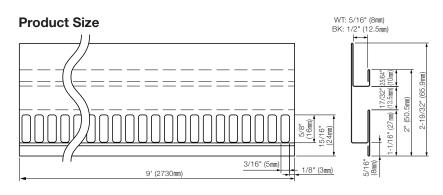

Sample Installation Detail Soffit Vent

Safety Consideration

WARNING

- Wear appropriate protective gear such as gloves, hard hats, and protective glasses while at work.
 Use appropriate cutting topics. Never use inappropriate tools for cutting purpose such as a sander to cut by friction. Properly handle the tools per their manufacturers' operations manual.
- Provide necessary personnel and equipment to ensure safety during transportation of the products. In particular, lengthy items must be carried by an appropriate number of people. If it must be carried by one person, keep it in balance by holding at the center point. Not doing so may lead to personal injury or property damages.
- Do not throw or drop the products. Do not step on the products or put anything on them.
 Doing so may lead to personal injury or property damages.
- Aware of sharp corners and edges of the products. In particular, be careful not to cut your hand or other body parts with a sharp edge of the products once it has been cut to length.
- Never burn, eat, or let children play with the products. Doing so may lead to serious accidents.
- Work outdoor in a well-ventilated Area

CAUTION

Avoid storage under very high or very low temperatures. Do not store the products outdoors.
 Do not keep the products upright. Doing so may lead to deformation of the products.

Soffit Board

- Store the products on a flat surface.
- Never draw out the products from a small opening of a package. Doing so may damage the products.
- Do not block the ventilating holes when you paint the products. Doing so may impair the ventilation performance.
- Avoid using in direct contact with chemical-treated woods, CCA containing copper, lead, etc. and fire-retardant timbers when using the products, as there is a chance of corrosion when in contact with these types of treated woods. Also, avoid joining the products with fittings or accessories using dissimilar metals such as copper, lead, and alloys.
- Do not use the products at coastal areas (potential damage by seawater) or dense fog-prone areas.
 This product is a painted galvanized steel, however extreme salty coastal air may speed up rusting.
- Drip water caused by exhaust fumes from cars or chimneys may peel off the paint and coating.

NOTICE

Advised to use proper nails to install Soffit Vent to prevent corrosion.

Ver1.0 NV24SK



Joto-Vent System USA, Inc.

17530 NE Union Hill Rd Suite 240, Redmond, WA 98052 Tel: (425)-256-2210 Fax: (425)-522-4804

URL: https://joto-vent.com